



DOBEST BRIGHT CO.,LIMITED

中山好倍儿照明有限公司
多贝尔电子科技有限公司



LED Linear Lighting System Catalog

DOBEST BRIGHT CO.,LIMITED

中山好倍儿照明有限公司
多贝尔电子科技有限公司

Web: www.tracklinearlight.com

Factory Address 1: 3rd Floor, No.26, Pingbei 1st Road, Nanping Science and Technology Industrial Park, Xiangzhou District, Zhuhai City, Guangdong, P.R China

Factory Address 2: 2nd Floor, 3rd Floor, No. 15, 1st Street, Hongye Road, Caoer, Guzhen Town, Zhongshan City, Guangdong Province

Email: candy@dobestbright.com / sales@dobestbright.com

Tel/Fax: +86-0756-3338786

Whatsapp: +86-18902868159



ABOUT DOBEST

DOBEST management has been working in the LED Lighting industry since 2008 and has had its oversea department since 2012. It is a professional manufacturing enterprise that focuses on the research and development and production of lighting fixtures.

DOBEST based in Zhuhai and Zhongshan Guangdong Province, and there are 2000 m² production line and warehouse in ZhongShan and a 500 m² show room and warehouse in Zhuhai.


www.tracklinearlight.com

DOBEST is a professional manufacturer with R&D and production in one, specializing in Led magnetic track lights, led Linear lights and LED Aluminum Profile, led penal lights, etc. Thanks to our inherited commitments to high QA/QC procedures, our operation process is accredited by ISO9001-2015. All of our product is with ETL, CE(EMC&LVD), RoHS, and SAA certifications.





DOBEST has a professional optical design, appearance design, thermal design, structure design, and electronic design engineers team. Our marketing team will collect your requirements, timely feedback to the relevant departments to solve your problems, provide quality and fast after-sales service.

www.tracklinearlight.com

FACTORY

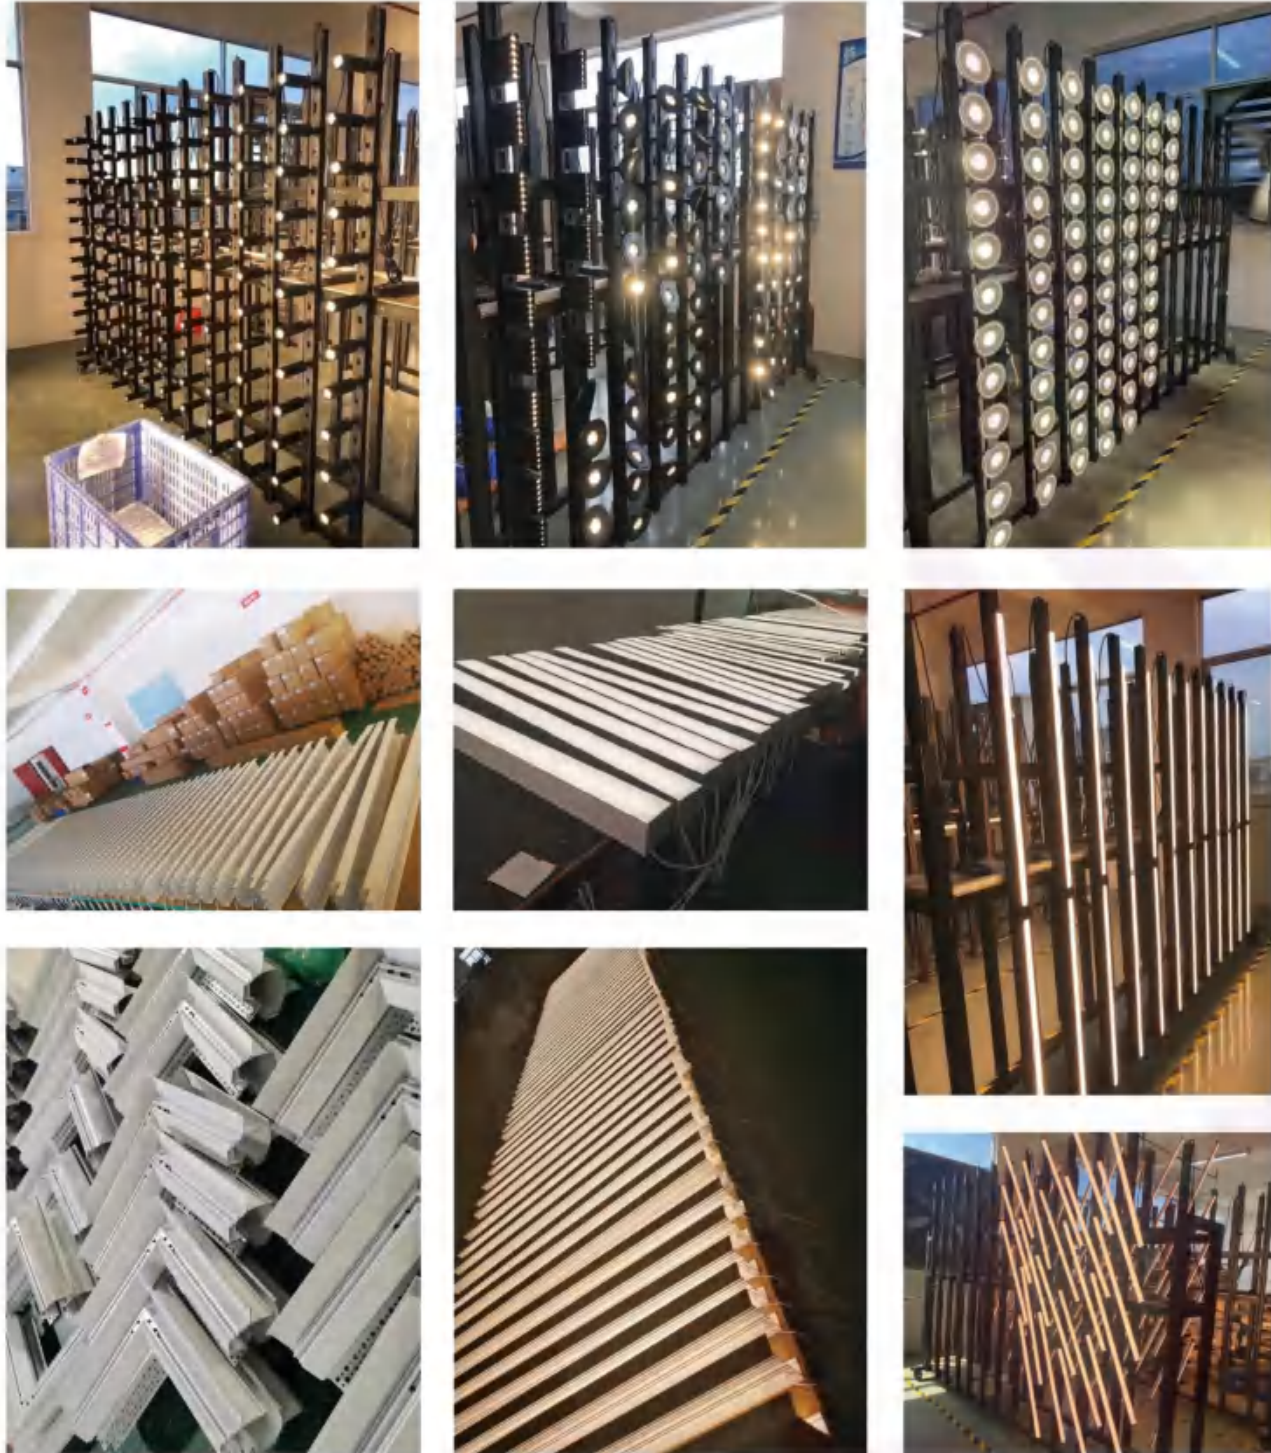

CERTIFICATES AND EXHIBITIONS


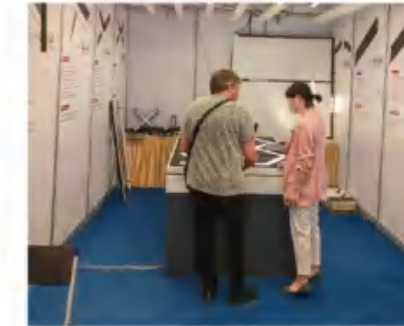
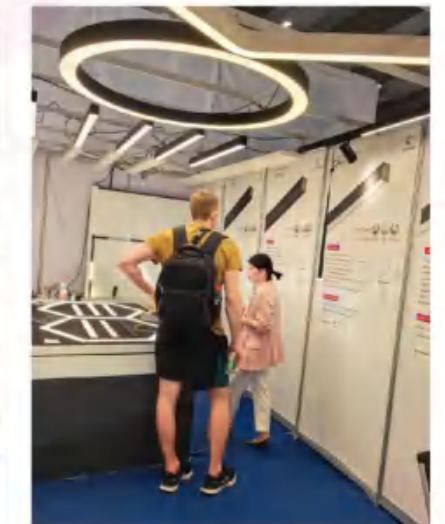
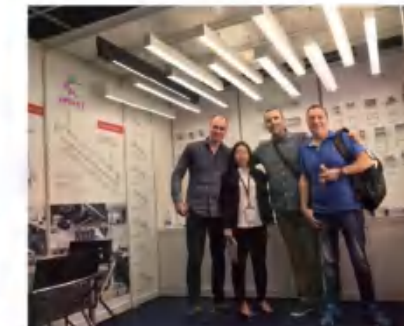
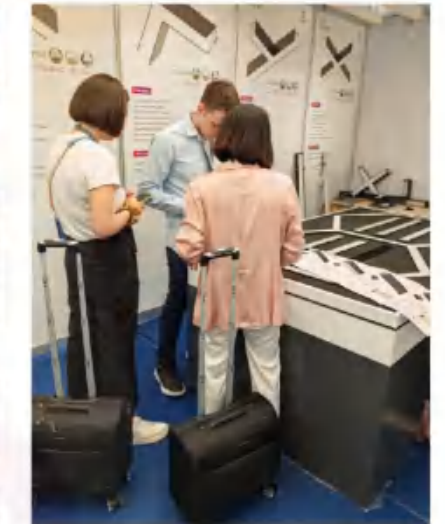


DOBEST BRIGHT PROJECT

- Light Planning
- Light Calculation (DIALUX)
- Photometric Simulation
- Customizing Light Solutions
- Comparison Studies
- Product Sourcing

Dobest Engineering Services

People make a successful organization. Dobest has a team of motivated light professionals to offer a multitude of light related services to find the best result for your projects

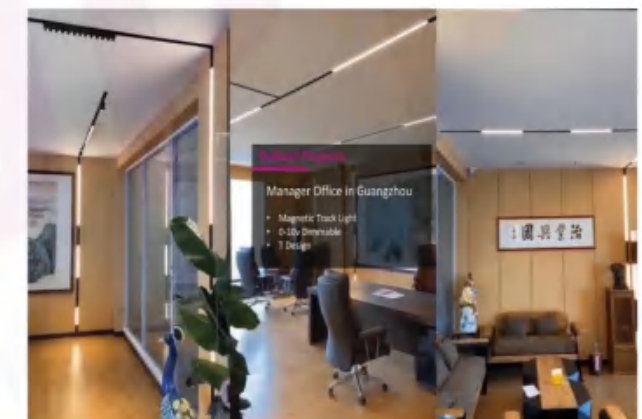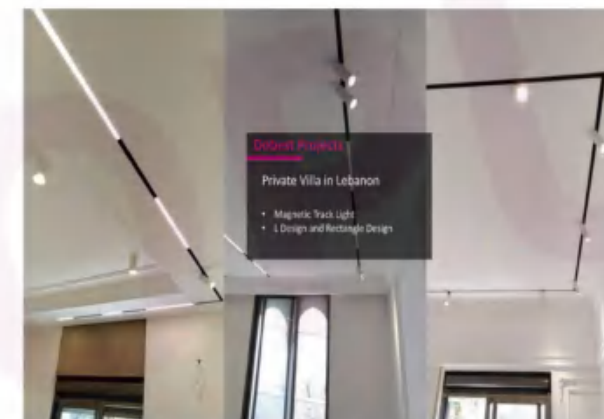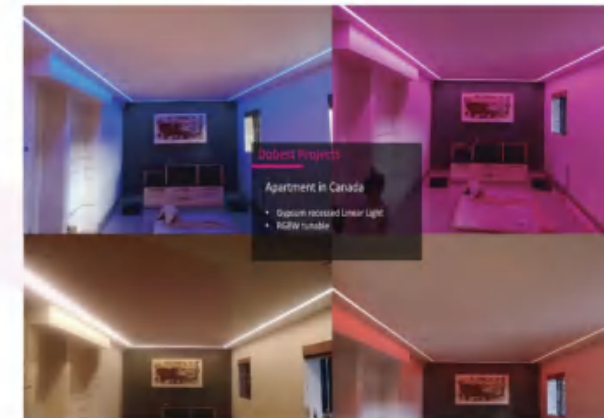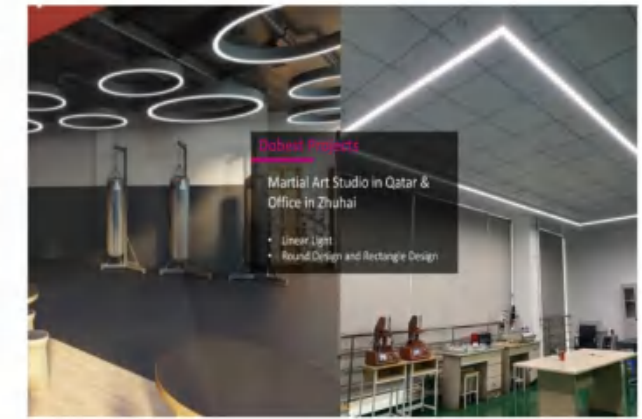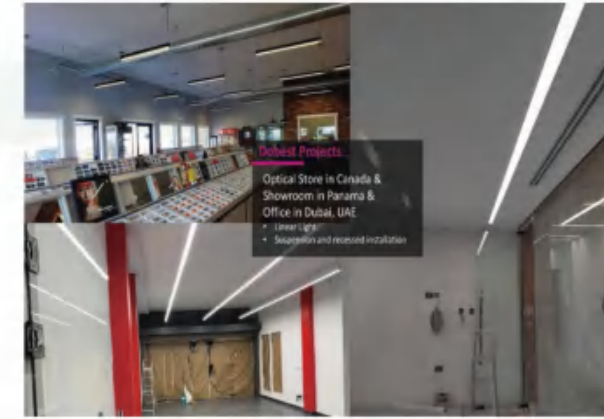

Dobest works together with clients to create fabulous customized lighting. Strong supply chain allow us to offer customized lighting service with reasonable price, satisfied quality. Noted: Only photos that the client has agreed to make public will be displayed.

多种智控方式

无线“智”更带感，支持多种连接方式控制，
智控调光，随心所变。



天猫直连



米家直连



智能涂鸦



涂鸦zigbee

蓝牙5.0、可控硅、0-10V、DALI、华为、苹果、欧瑞博、绿米、摩根



语音控制



APP控制



遥控控制




墙开关控制

48V SYSTEM
泛光灯系列
Floodlight series




48V SYSTEM
泛光灯系列
Floodlight series

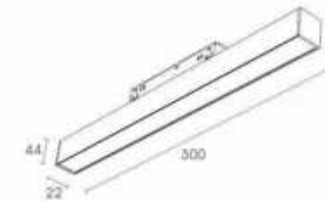



DB-M20-DFS-300

功率Power: 10W
色温CCT: 3000K 4000K 6000K
显指CRI: RA≥97
光束角Beam Angle: 120°
尺寸Size: L300*W22*H45mm

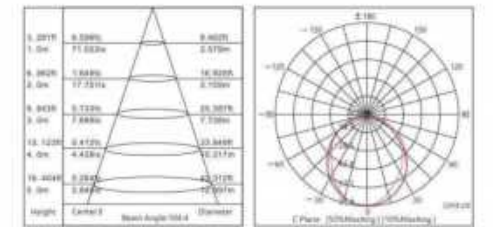


DB-M20-DFS-600

功率Power: 20W
色温CCT: 3000K 4000K 6000K
显指CRI: RA≥97
光束角Beam Angle: 120°
尺寸Size: L600*W22*H45mm

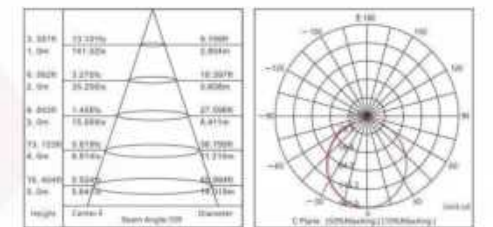

DB-M20-DFS-1200

功率Power: 40W
色温CCT: 3000K 4000K 6000K
显指CRI: RA≥97
光束角Beam Angle: 120°
尺寸Size: L1200*W22*H45mm

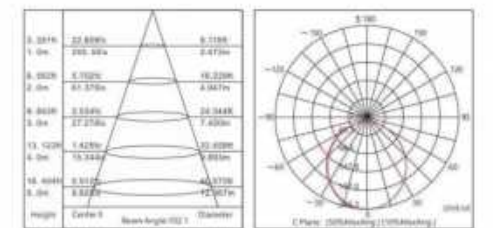


Brighten your life, warm your heart

48V SYSTEM
格栅灯系列
Grille lamp series




48V SYSTEM
格栅灯系列
Grille lamp series





DB-M20-CC1-9

功率Power: 6W
色温CCT: 3000K 4000K 6000K
显指CRI: RA≥97
光束角Beam Angle: 24°
尺寸Size: L110*W22*H45mm

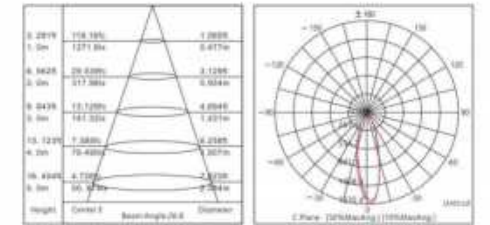


DB-M20-CC2-9

功率Power: 12W
色温CCT: 3000K 4000K 6000K
显指CRI: RA≥97
光束角Beam Angle: 24°
尺寸Size: L220*W22*H45mm

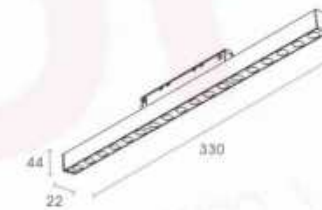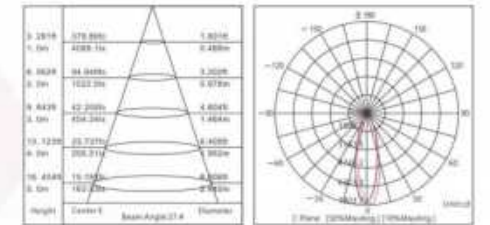

DB-M20-CC3-9


功率Power: 18W
色温CCT: 3000K 4000K 6000K
显指CRI: RA≥97
光束角Beam Angle: 24°
尺寸Size: L330*W22*H45mm

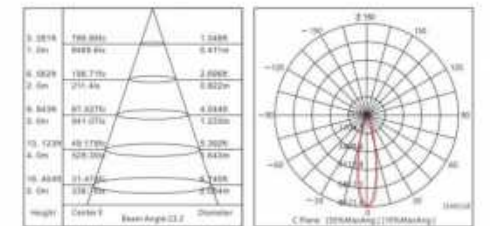

48V SYSTEM
折叠灯系列
Folding lamp series





48V SYSTEM
折叠灯系列
Folding lamp series

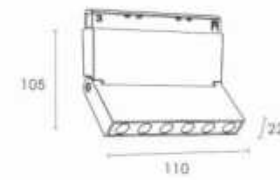



DB-M20-LBM6-M1

功率Power: 6W
色温CCT: 3000K 4000K 6000K
显指CRI: RA≥97
光束角Beam Angle: 24°
尺寸Size: L110*W22*H105mm

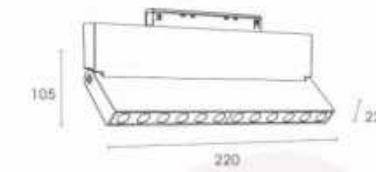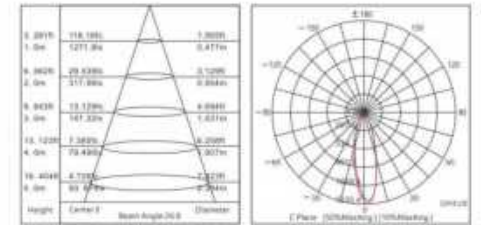


DB-M20-LBM12-M1

功率Power: 12W
色温CCT: 3000K 4000K 6000K
显指CRI: RA≥97
光束角Beam Angle: 24°
尺寸Size: L220*W22*H105mm

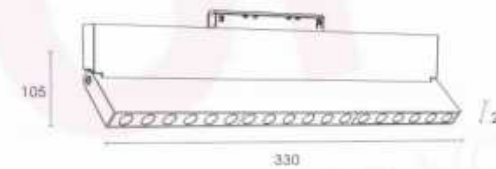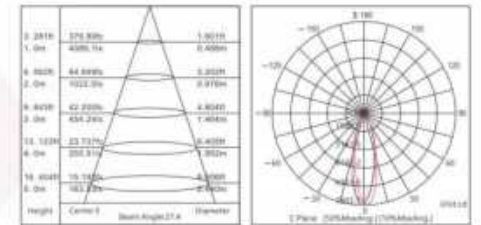

DB-M20-LBM12-NDF


功率Power: 18W
色温CCT: 3000K 4000K 6000K
显指CRI: RA≥97
光束角Beam Angle: 24°
尺寸Size: L330*W22*H105mm

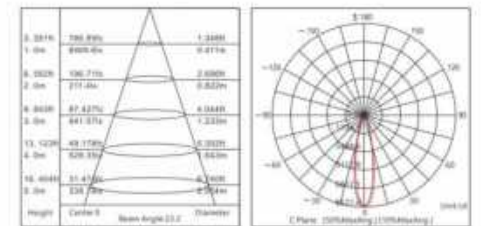

Brighten your life, warm you





48V SYSTEM
折叠灯系列
Folding lamp series

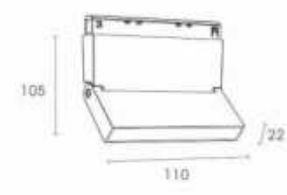



DB-M20-LBM6-N

功率Power: 6W
色温CCT: 3000K 4000K 6000K
显指CRI: RA≥97
光束角Beam Angle: 120°
尺寸Size: L110*W22*H105mm

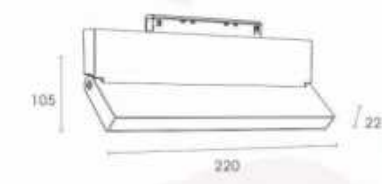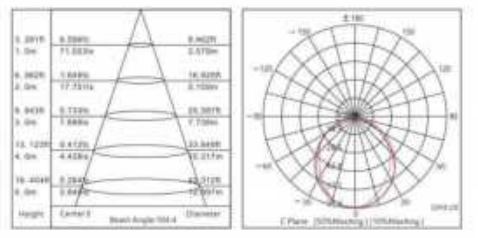


DB-M20-LBM12-N

功率Power: 12W
色温CCT: 3000K 4000K 6000K
显指CRI: RA≥97
光束角Beam Angle: 120°
尺寸Size: L220*W22*H105mm

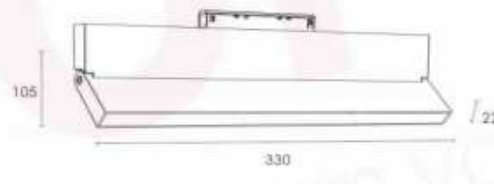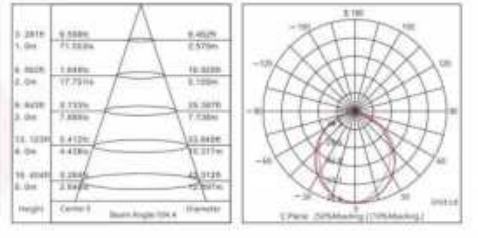

DB-M20-LBM10


功率Power: 18W
色温CCT: 3000K 4000K 6000K
显指CRI: RA≥97
光束角Beam Angle: 120°
尺寸Size: L330*W22*H105mm

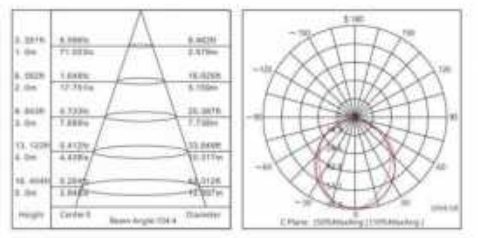

Brighten your life, warm you



48V SYSTEM
导轨灯系列
Track light series







DB-M20-TL7

功率/Power: 10W
色温/CCT: 3000K 4000K 6000K
显指/CRI: RA≥97
光束角/Beam Angle: 24°
尺寸/Size: Φ40*L100mm

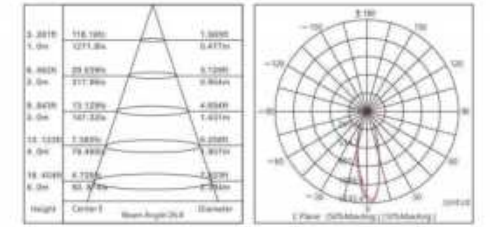



DB-M20-TL12

功率/Power: 15W
色温/CCT: 3000K 4000K 6000K
显指/CRI: RA≥97
光束角/Beam Angle: 24°
尺寸/Size: Φ50*L120mm

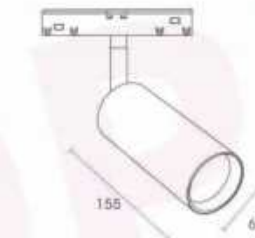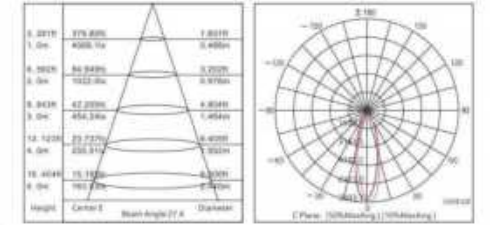


DB-M20-TL20

功率/Power: 20W
色温/CCT: 3000K 4000K 6000K
显指/CRI: RA≥97
光束角/Beam Angle: 24°
尺寸/Size: Φ68*L155mm

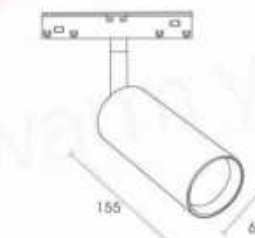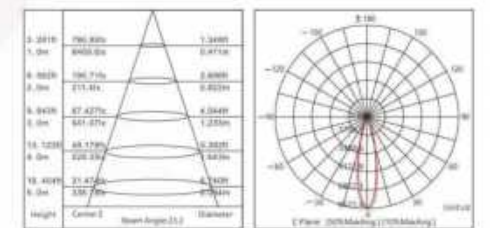

DB-M20-TL30

功率/Power: 30W
色温/CCT: 3000K 4000K 6000K
显指/CRI: RA≥97
光束角/Beam Angle: 24°
尺寸/Size: Φ68*L155mm

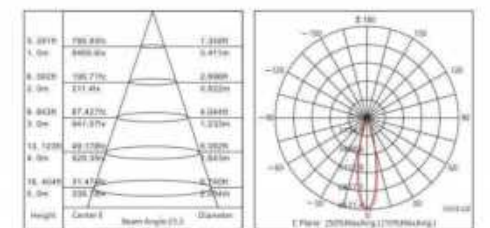

48V SYSTEM
导轨灯系列
Track light series






48V SYSTEM



调焦 导轨灯系列

Adjusting light series

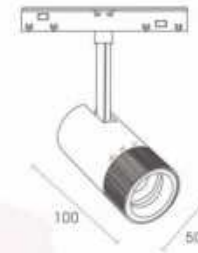


DB-M20-LB-6

功率/Power: 8W
色温/CCT: 3000K 4000K 6000K
显指/CRI: RA≥90
光束角/Beam Angle: 15-38°
尺寸/Size: Φ50*L100mm

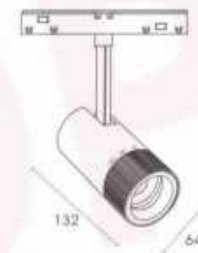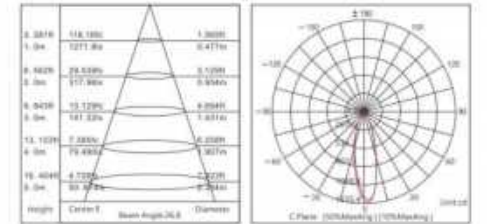


DB-M20-LB-12

功率/Power: 15W
色温/CCT: 3000K 4000K 6000K
显指/CRI: RA≥90
光束角/Beam Angle: 15-60°
尺寸/Size: Φ64*L132mm


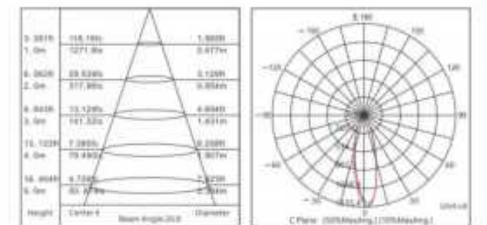


Brighten your life, warm your heart.

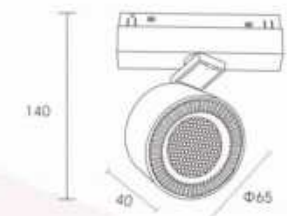


DB-M20-FM-9

功率/Power: 12W
色温/CCT: 3000K 4000K 6000K
显指/CRI: RA≥97
光束角/Beam Angle: 24°
尺寸/Size: Φ65*L40*H140mm

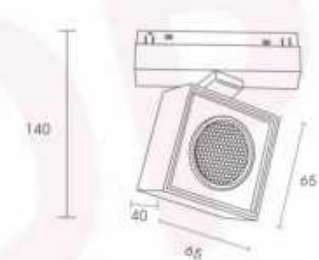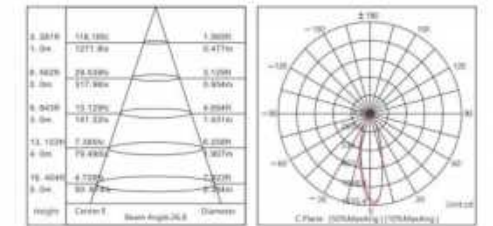


DB-M20-FMR-9

功率/Power: 12W
色温/CCT: 3000K 4000K 6000K
显指/CRI: RA≥97
光束角/Beam Angle: 24°
尺寸/Size: 65*65*L40*H140mm

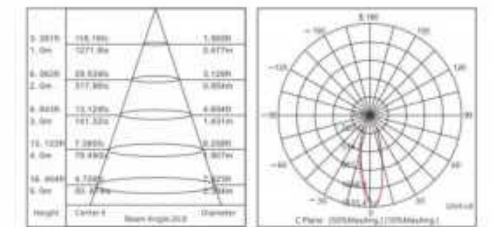

48V SYSTEM
**圆形/方形
导轨灯系列**
Round/Square light series

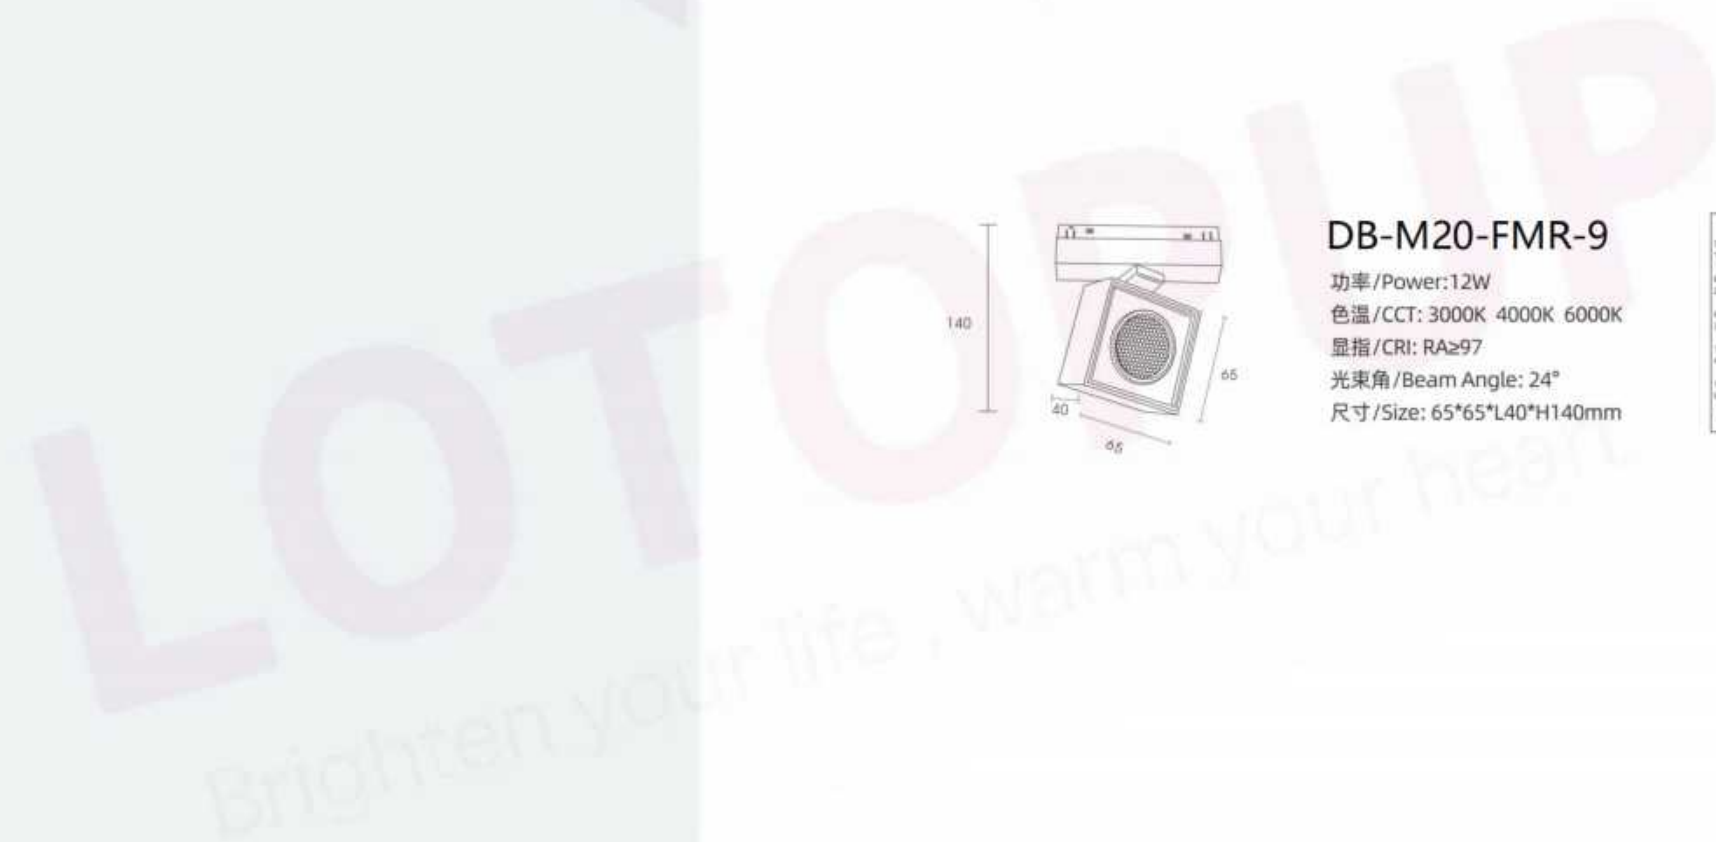



48V SYSTEM


吊线灯系列

Pendant light series



DB-M20-DFSM-300


功率/Power: 6W/10W
色温/CCT: 3000K 4000K
显指/CRI: RA≥97
光束角/Beam Angle: 24°
尺寸/Size: Φ30*H300mm

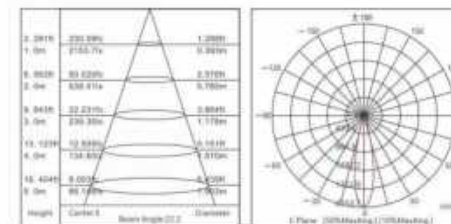

48V SYSTEM


落日灯系列

Sunset light series

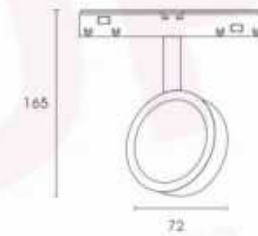

DB-M20-TR-90°

功率/Power: 6W
色温/CCT: 夕阳色
显指/CRI: RA≥90
光束角/Beam Angle: 120°
尺寸/Size: Φ72*H165mm

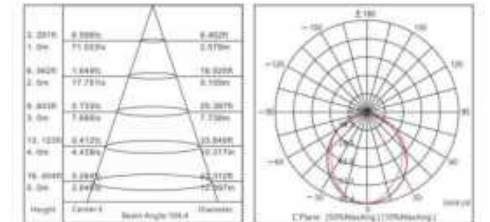




48V SYSTEM


迷你 格栅灯系列

Mini grille light series

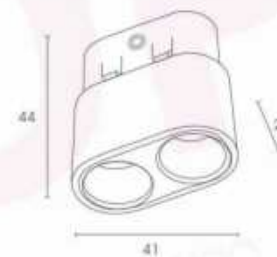

DB-M20-LBM5

功率/Power: 2W*2
色温/CCT: 3000K 4000K
显指/CRI: RA≥90
光束角/Beam Angle: 24°
尺寸/Size: 41*22*H45mm

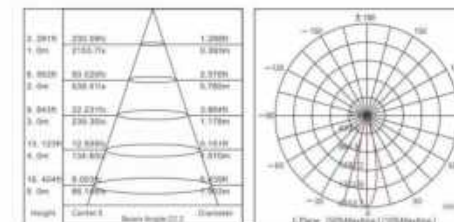

LED 一体电源 LED DRIVER

型号：48V 100W

输入电压：180~265V / 100~265V
输出电压：48V DC
输出电流：2.1A
尺寸：218*22*H44mm

型号：48V 200W

输入电压：180~265V / 100~265V
输出电压：48V DC
输出电流：4A
尺寸：317*22*H44mm

型号：48V 300W

输入电压：180~265V
输出电压：48V DC
输出电流：6A
尺寸：350*22*H44mm



十字导电模块

输入电压：DC48V-
尺寸：390*390mm
十字转角拼接通电使用



T 型导电模块

输入电压：DC48V-
尺寸：390*200mm
T型转角拼接通电使用



直通导电模块

输入电压：DC48V-
尺寸：L200mm
轨与轨拼接通电使用



转角导电模块

输入电压：DC48V-
尺寸：L285mm
转角拼接通电使用



输入导电模块

输入电压：DC48V-
尺寸：L425mm
开关电源输入通电使用/
智能灯具信号线



磁吸轨道条

Magnetic track



LOTOPUP
Brighten your life, warm your heart.




嵌入批灰轨道

安装方式：批灰式

开槽：35mm

截面：63*H48mm

长度：100cm/200cm/300cm

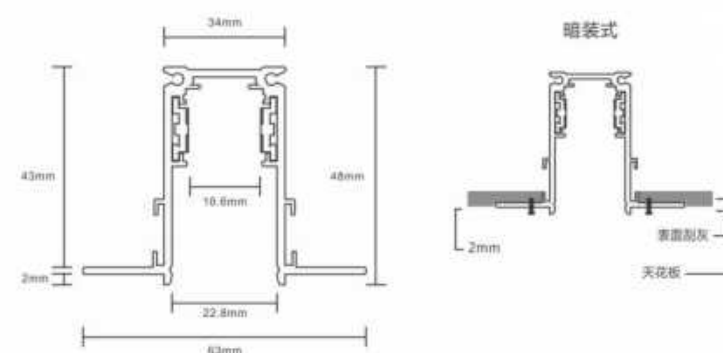

水平转角



T型转角



十字转角



垂直转角

R20-A

嵌入批灰轨道
4线紫铜0.8

标准款

加厚款



截面图



轨道连接片






预埋轨道

安装方式：预埋嵌入式

开槽：槽宽35mm*深度50mm

截面：63*H48mm

长度：100cm/200cm/300cm

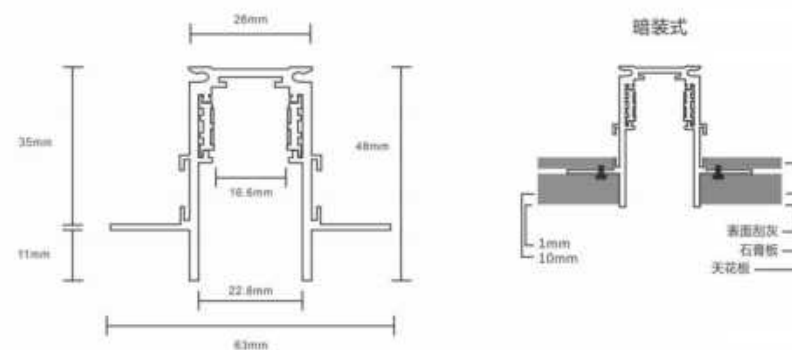

水平转角



T型转角



十字转角




垂直转角

R20-B
嵌装轨道
4线紫铜0.8

标准款

加厚款

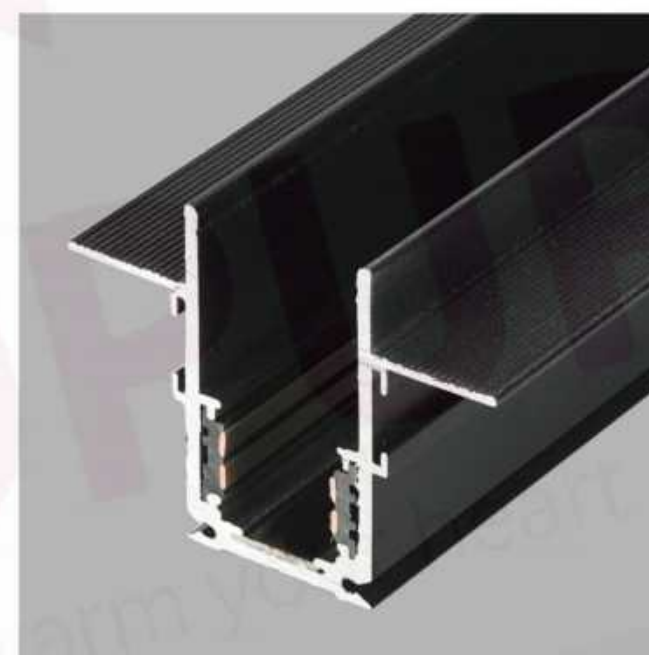

截面图



轨道连接片




Brighten your life, warm your heart



防裂嵌装轨道

安装方式：预埋嵌入式
开槽：槽宽35mm*深度50mm
截面：72*H48mm
长度：100cm/200cm/300cm

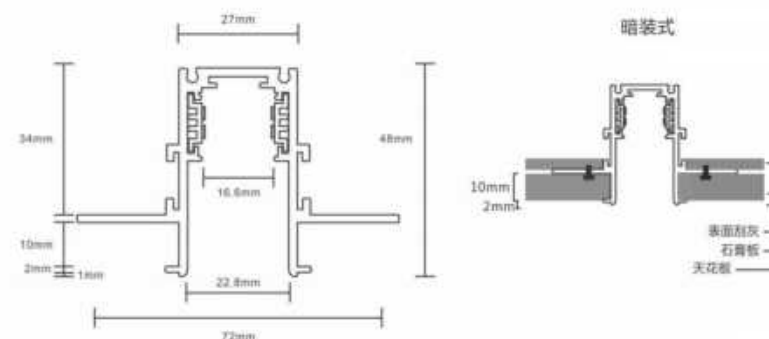

R20-C

折边防裂嵌装轨道
4线紫铜0.8

标准款

加厚款



水平转角



垂直转角



截面图



轨道连接片





明装轨道

安装方式：吸顶/吊装

开槽：无

截面：26*H51mm

长度：100cm/200cm/300cm



S20 明装固定扣





S20 吊线包



S20 轨道连接片



S20 铝方通挂扣

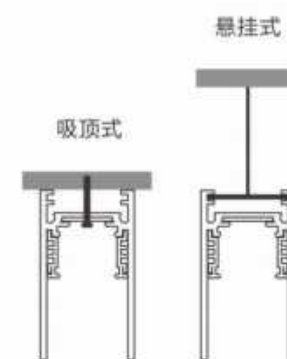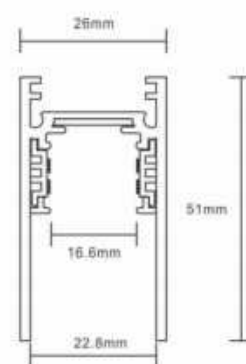

水平转角



T型转角



十字转角




垂直转角

S20

吸顶/吊装轨道
4线紫铜0.8

标准款

加厚款

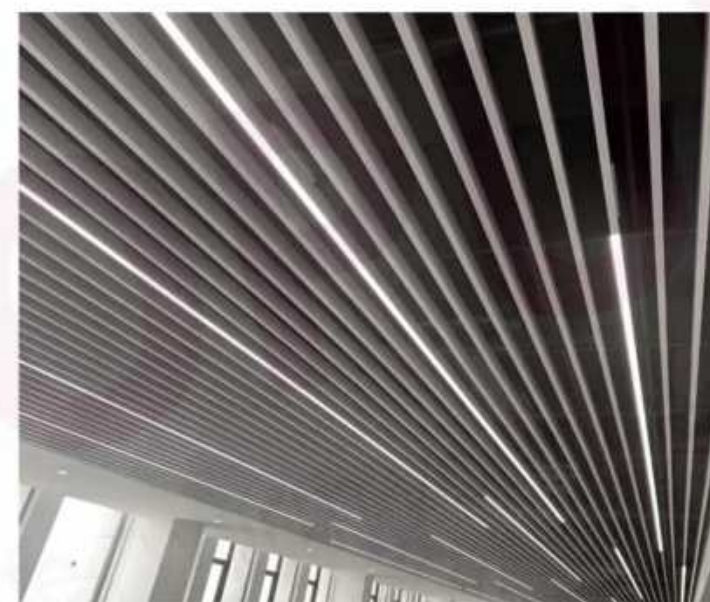

场景图



铝方通示意图




明装轨道

安装方式：吸顶/吊装

开槽：无

截面：26*H21mm

长度：100cm/200cm/300cm

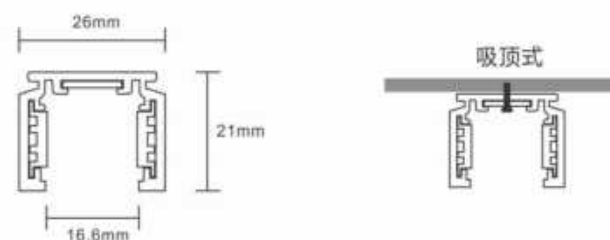


S20-A 明装矮款

吸顶/吊装轨道

4线紫铜0.8

标准款

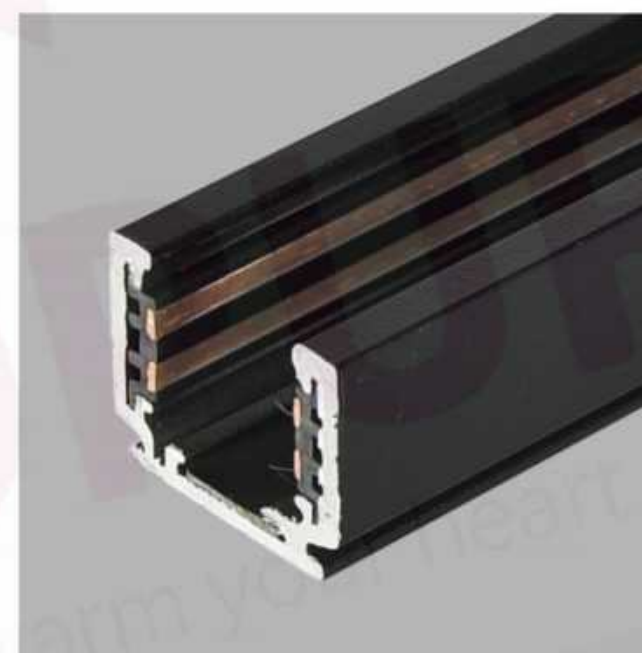

截面图



S20 U形扣



S20吊线包



LOTO
Brighten your life, warm your heart




S20-B 明装带边

安装方式：嵌入/吸顶/吊装

开槽：30mm

截面：40*H51mm

长度：100cm/200cm/300cm

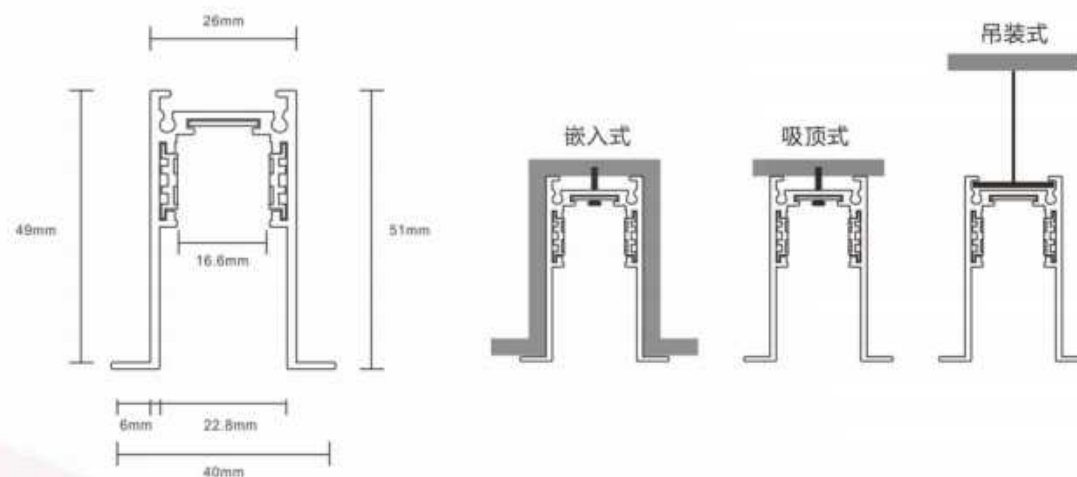

S20-B 明装带边

嵌入/吸顶/吊装轨道

4线紫铜0.8

标准款



截面图



S20 嵌装弹簧



蜂窝板示意图



S20 明装固定扣



S20 吊线包



S20 轨道连接片



Brighten your life





吊装轨道

安装方式：吊装

开槽：无

截面：48*H50mm

长度：300cm

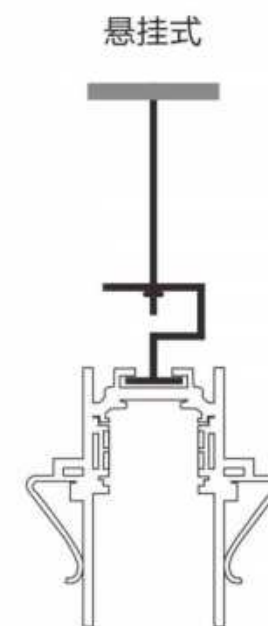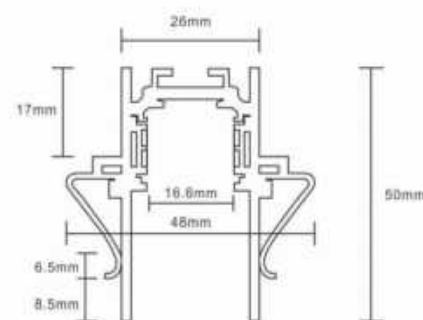

F20
集成吊顶轨道
4线紫铜0.8

高度随意调节
6-8mm丝杆均可兼容

标准款



F20
蜂窝顶轨道
螺杆固定配件



Brighten your life.

水平转角



R20-A嵌装水平转角

开槽/Slotting: 35mm
尺寸/Size: 100*100mm
(含转角钣金片)



R20-A嵌装水平转角

开槽/Slotting: 35mm
尺寸/Size: 200*130mm
(含转角钣金片)



R20-A嵌装水平转角

开槽/Slotting: 35mm
尺寸/Size: 200*200mm
(含转角钣金片)



R20-B嵌装水平转角

开槽/Slotting: 35mm
尺寸/Size: 100*100mm
(含转角钣金片)



R20-B嵌装水平转角

开槽/Slotting: 35mm
尺寸/Size: 200*130mm
(含转角钣金片)



R20-B嵌装水平转角

开槽/Slotting: 35mm
尺寸/Size: 200*200mm
(含转角钣金片)



S20明装水平转角

开槽/Slotting: ---
尺寸/Size: 100*100mm
(含连接铁片)



S20明装水平转角

开槽/Slotting: ---
尺寸/Size: 170*130mm
(含连接铁片)



S20明装水平转角

开槽/Slotting: ---
尺寸/Size: 170*170mm
(含连接铁片)



R20-C防裂款嵌装水平转角

开槽/Slotting: 35mm
尺寸/Size: 100*100mm
(含转角钣金片)

垂直转角



R20-A嵌装垂直转角

开槽/Slotting: 35mm
尺寸/Size: 100*100mm
(含转角钣金片)



R20-B嵌装垂直转角

开槽/Slotting: 35mm
尺寸/Size: 100*100mm
(含转角钣金片)



R20-C防裂款嵌装垂直转角

开槽/Slotting: 35mm
尺寸/Size: 100*100mm
(含转角钣金片)



S20明装垂直转角

开槽/Slotting: ---
尺寸/Size: 100*100mm
(含连接铁片)

LOTOPUP
Brighten your life, warm your heart.